
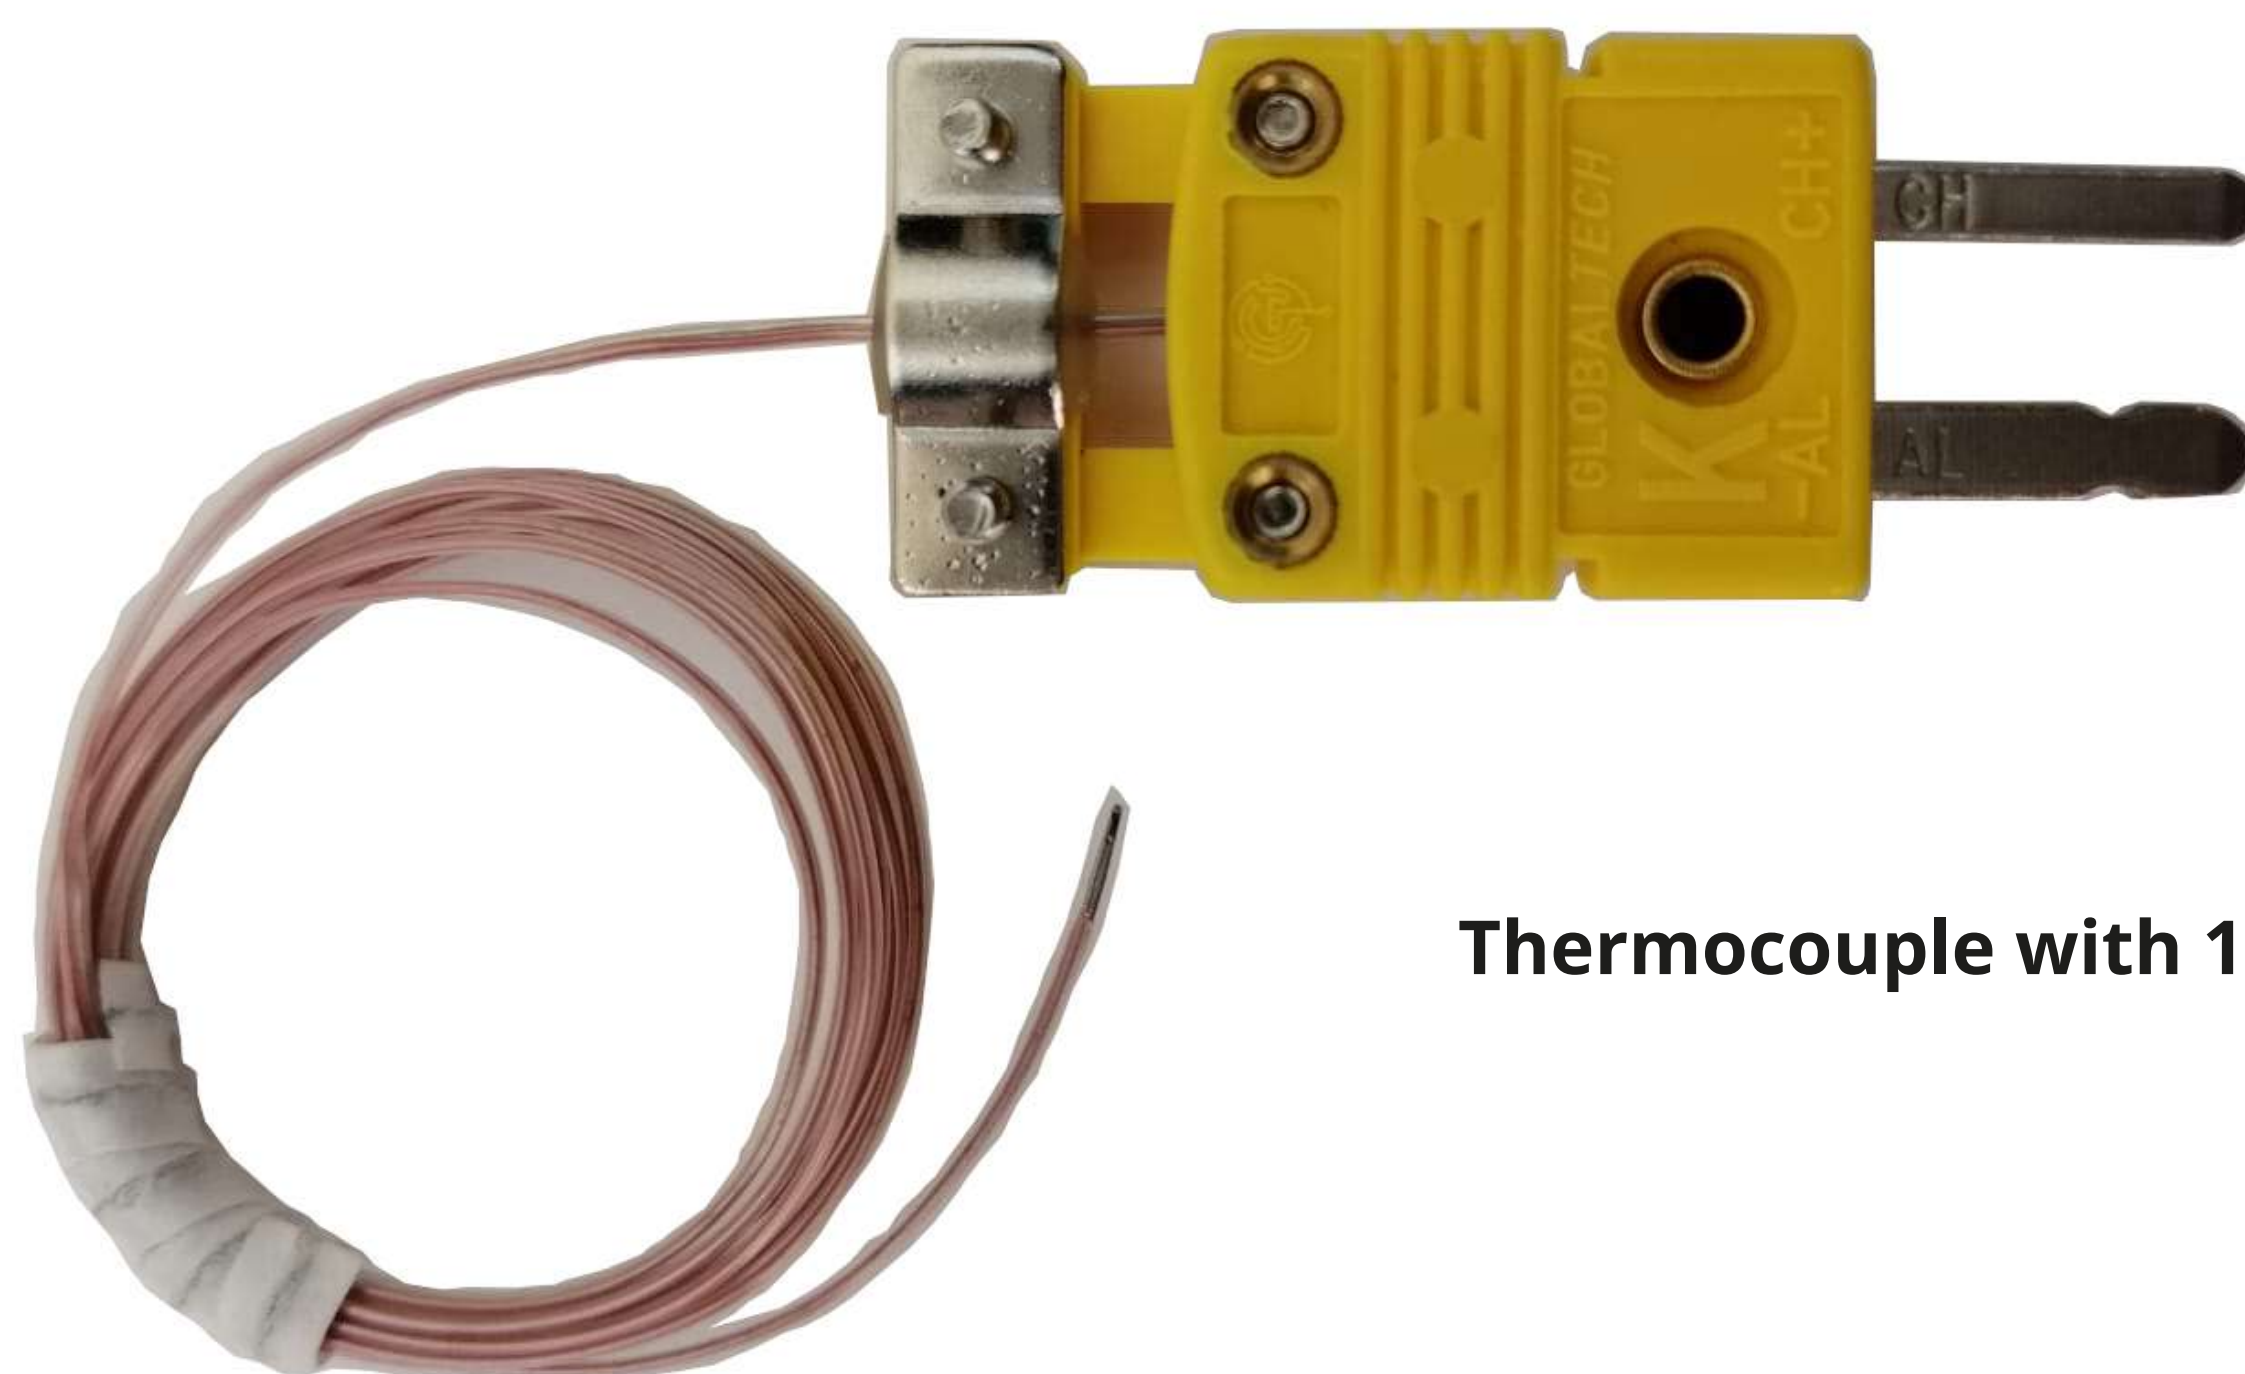


Specifications for type "K" Thermocouple with Reinforced Connector P/N: GTSS-TT-K-(AWG)- R

Ultimate Miniature Size Connector
With Integral Cable Clamp Cap
Glass Filled Nylon Range -29 to
220°C (-20 to 425°F)

- Integral Cap+Cable Clamp
- strain Relief With Grommet
- Captive Cover Screws
- Captive Clamp Screws
- Accepts Stranded or Solid Wire as Small as 40 AWG Up to 20 AWG, or Over-braid, TWSH, Armored Up to 5.5 mm (0.22") OD
- Contact Washers for Quick Connect Wire Termination
 - Use Straight Wire
 - No Wire Loop Required
- Internal Wire Divider
- Write-On Window
- Combination Phillips/Slot Screws
- 100% Top Side Assembly

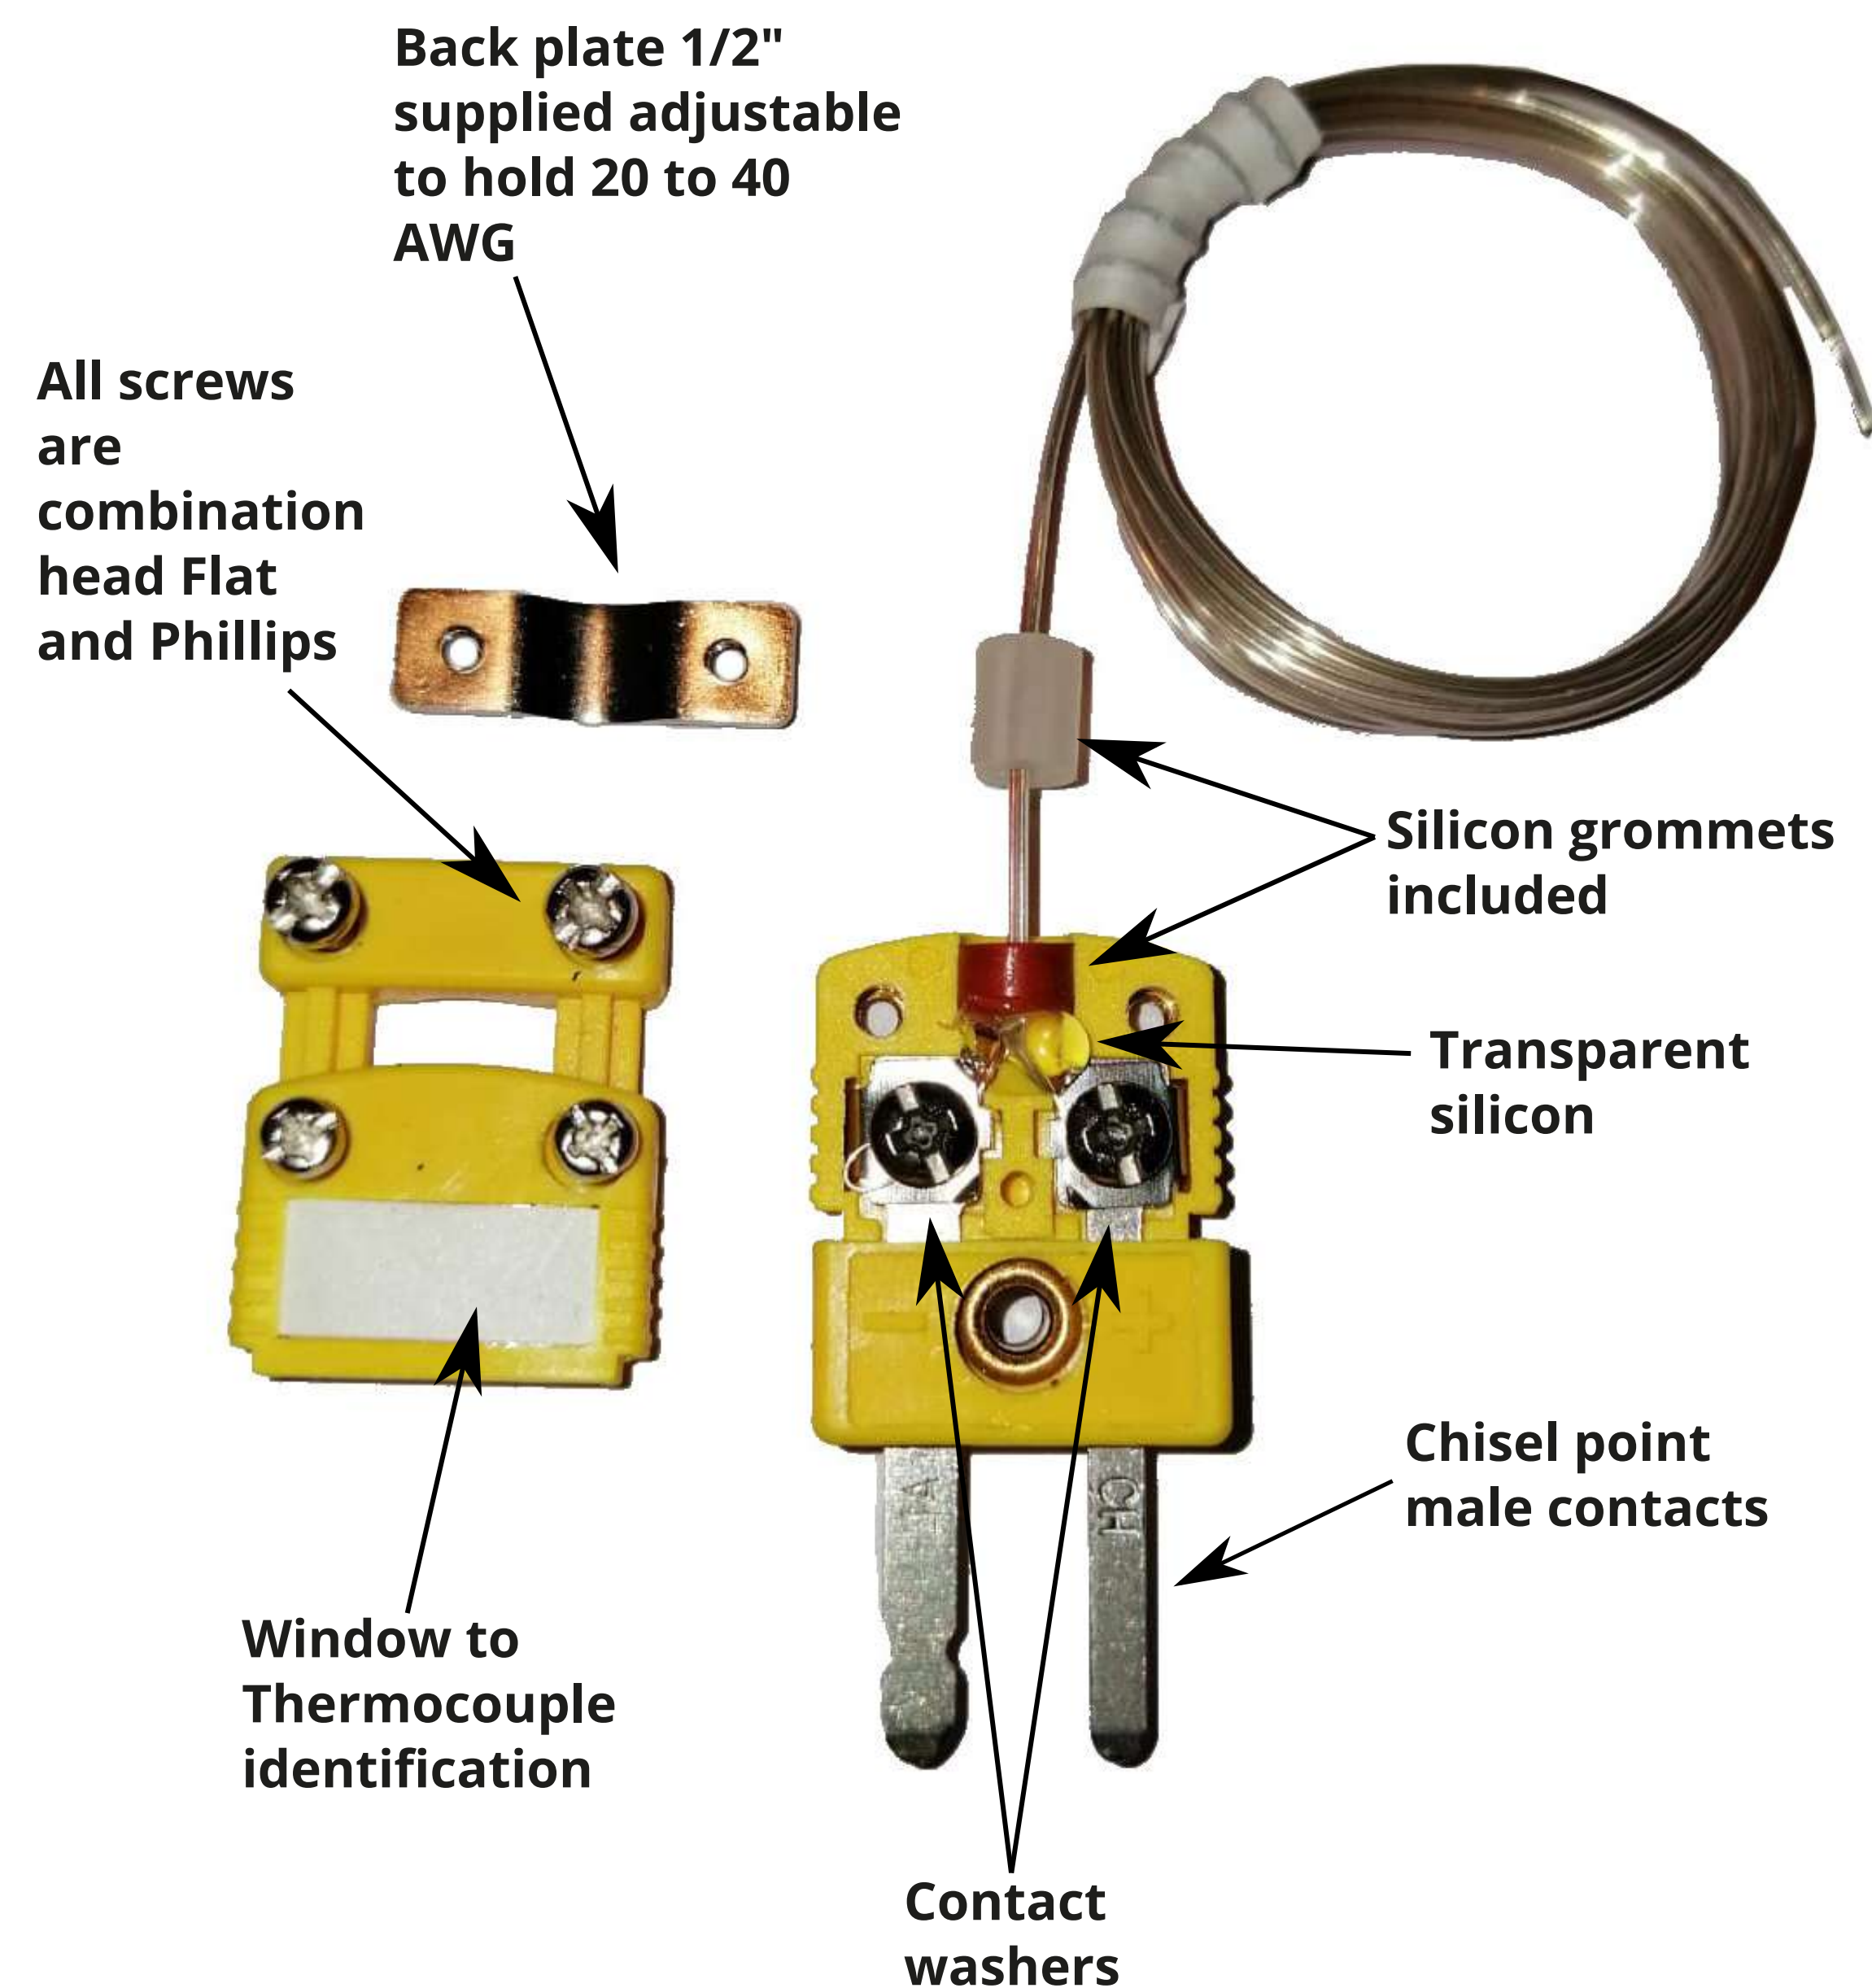

GLOBALTECH

SALES & SERVICES

www.globaltechss.com

✉ sales@globaltechss.com



☎ MX +52-33-3693-0210

☎ USA 210-485-4233

Specifications for Type "K" Thermocouple with Normal Connector P/N: GTSS-TT-K-(AWG)

Type SMPW Glass Filled Nylon
-29 to 180°C (-20 to 356°F) Service Temperature

- Heavy Duty Construction
- Color-Coded for ANSI and IEC
- Captive Cover Screws
- Accepts Stranded or Solid Wire up to Size 20 AWG
- Quick Connect Contact Washers
- Internal Wire Divider
- Combination Phillips/Slot Screws

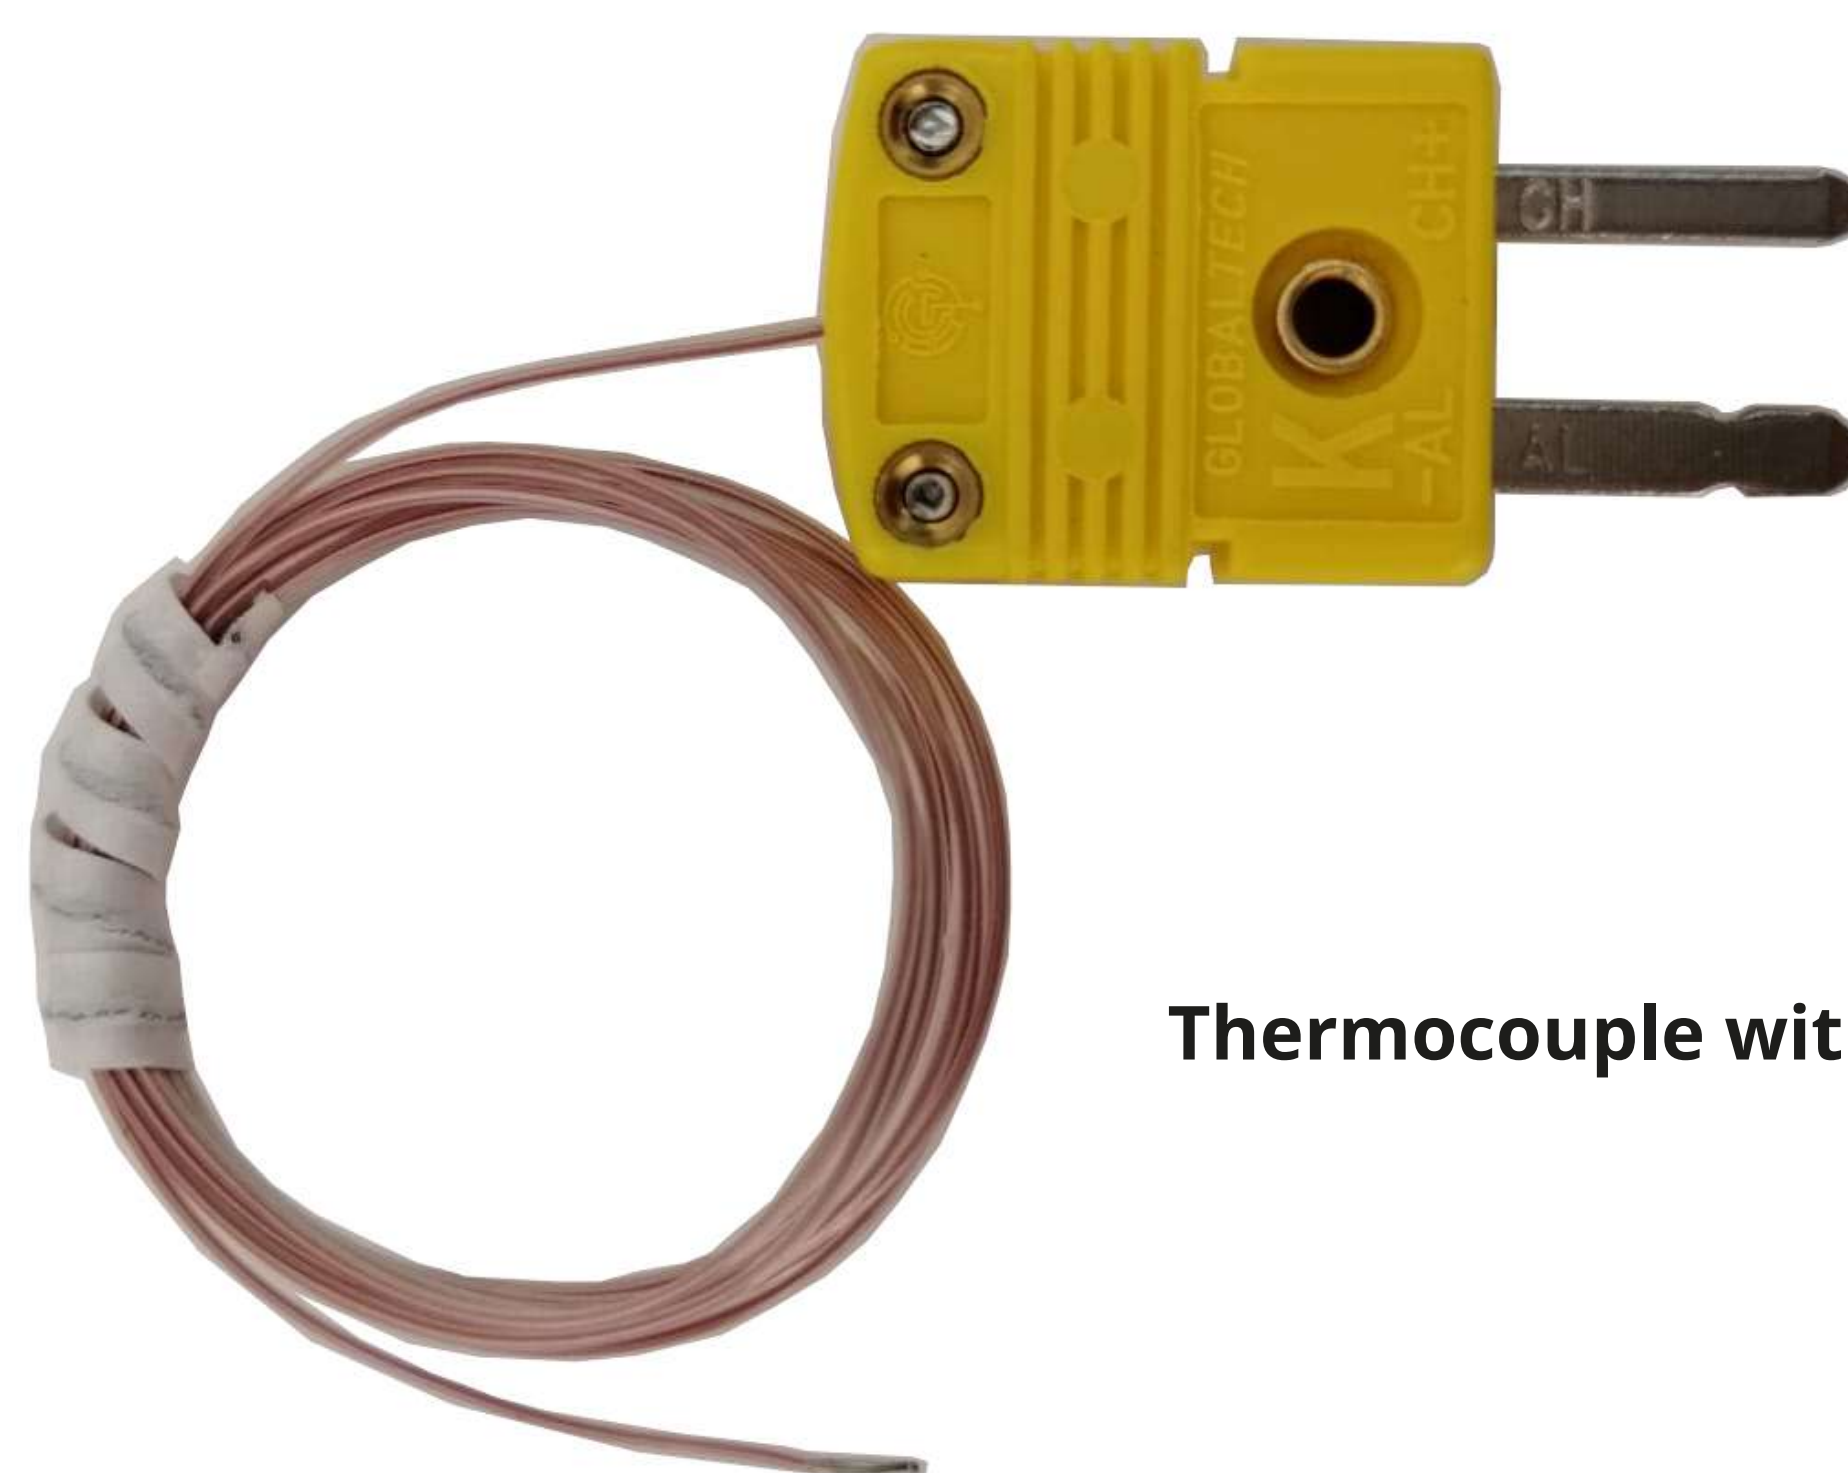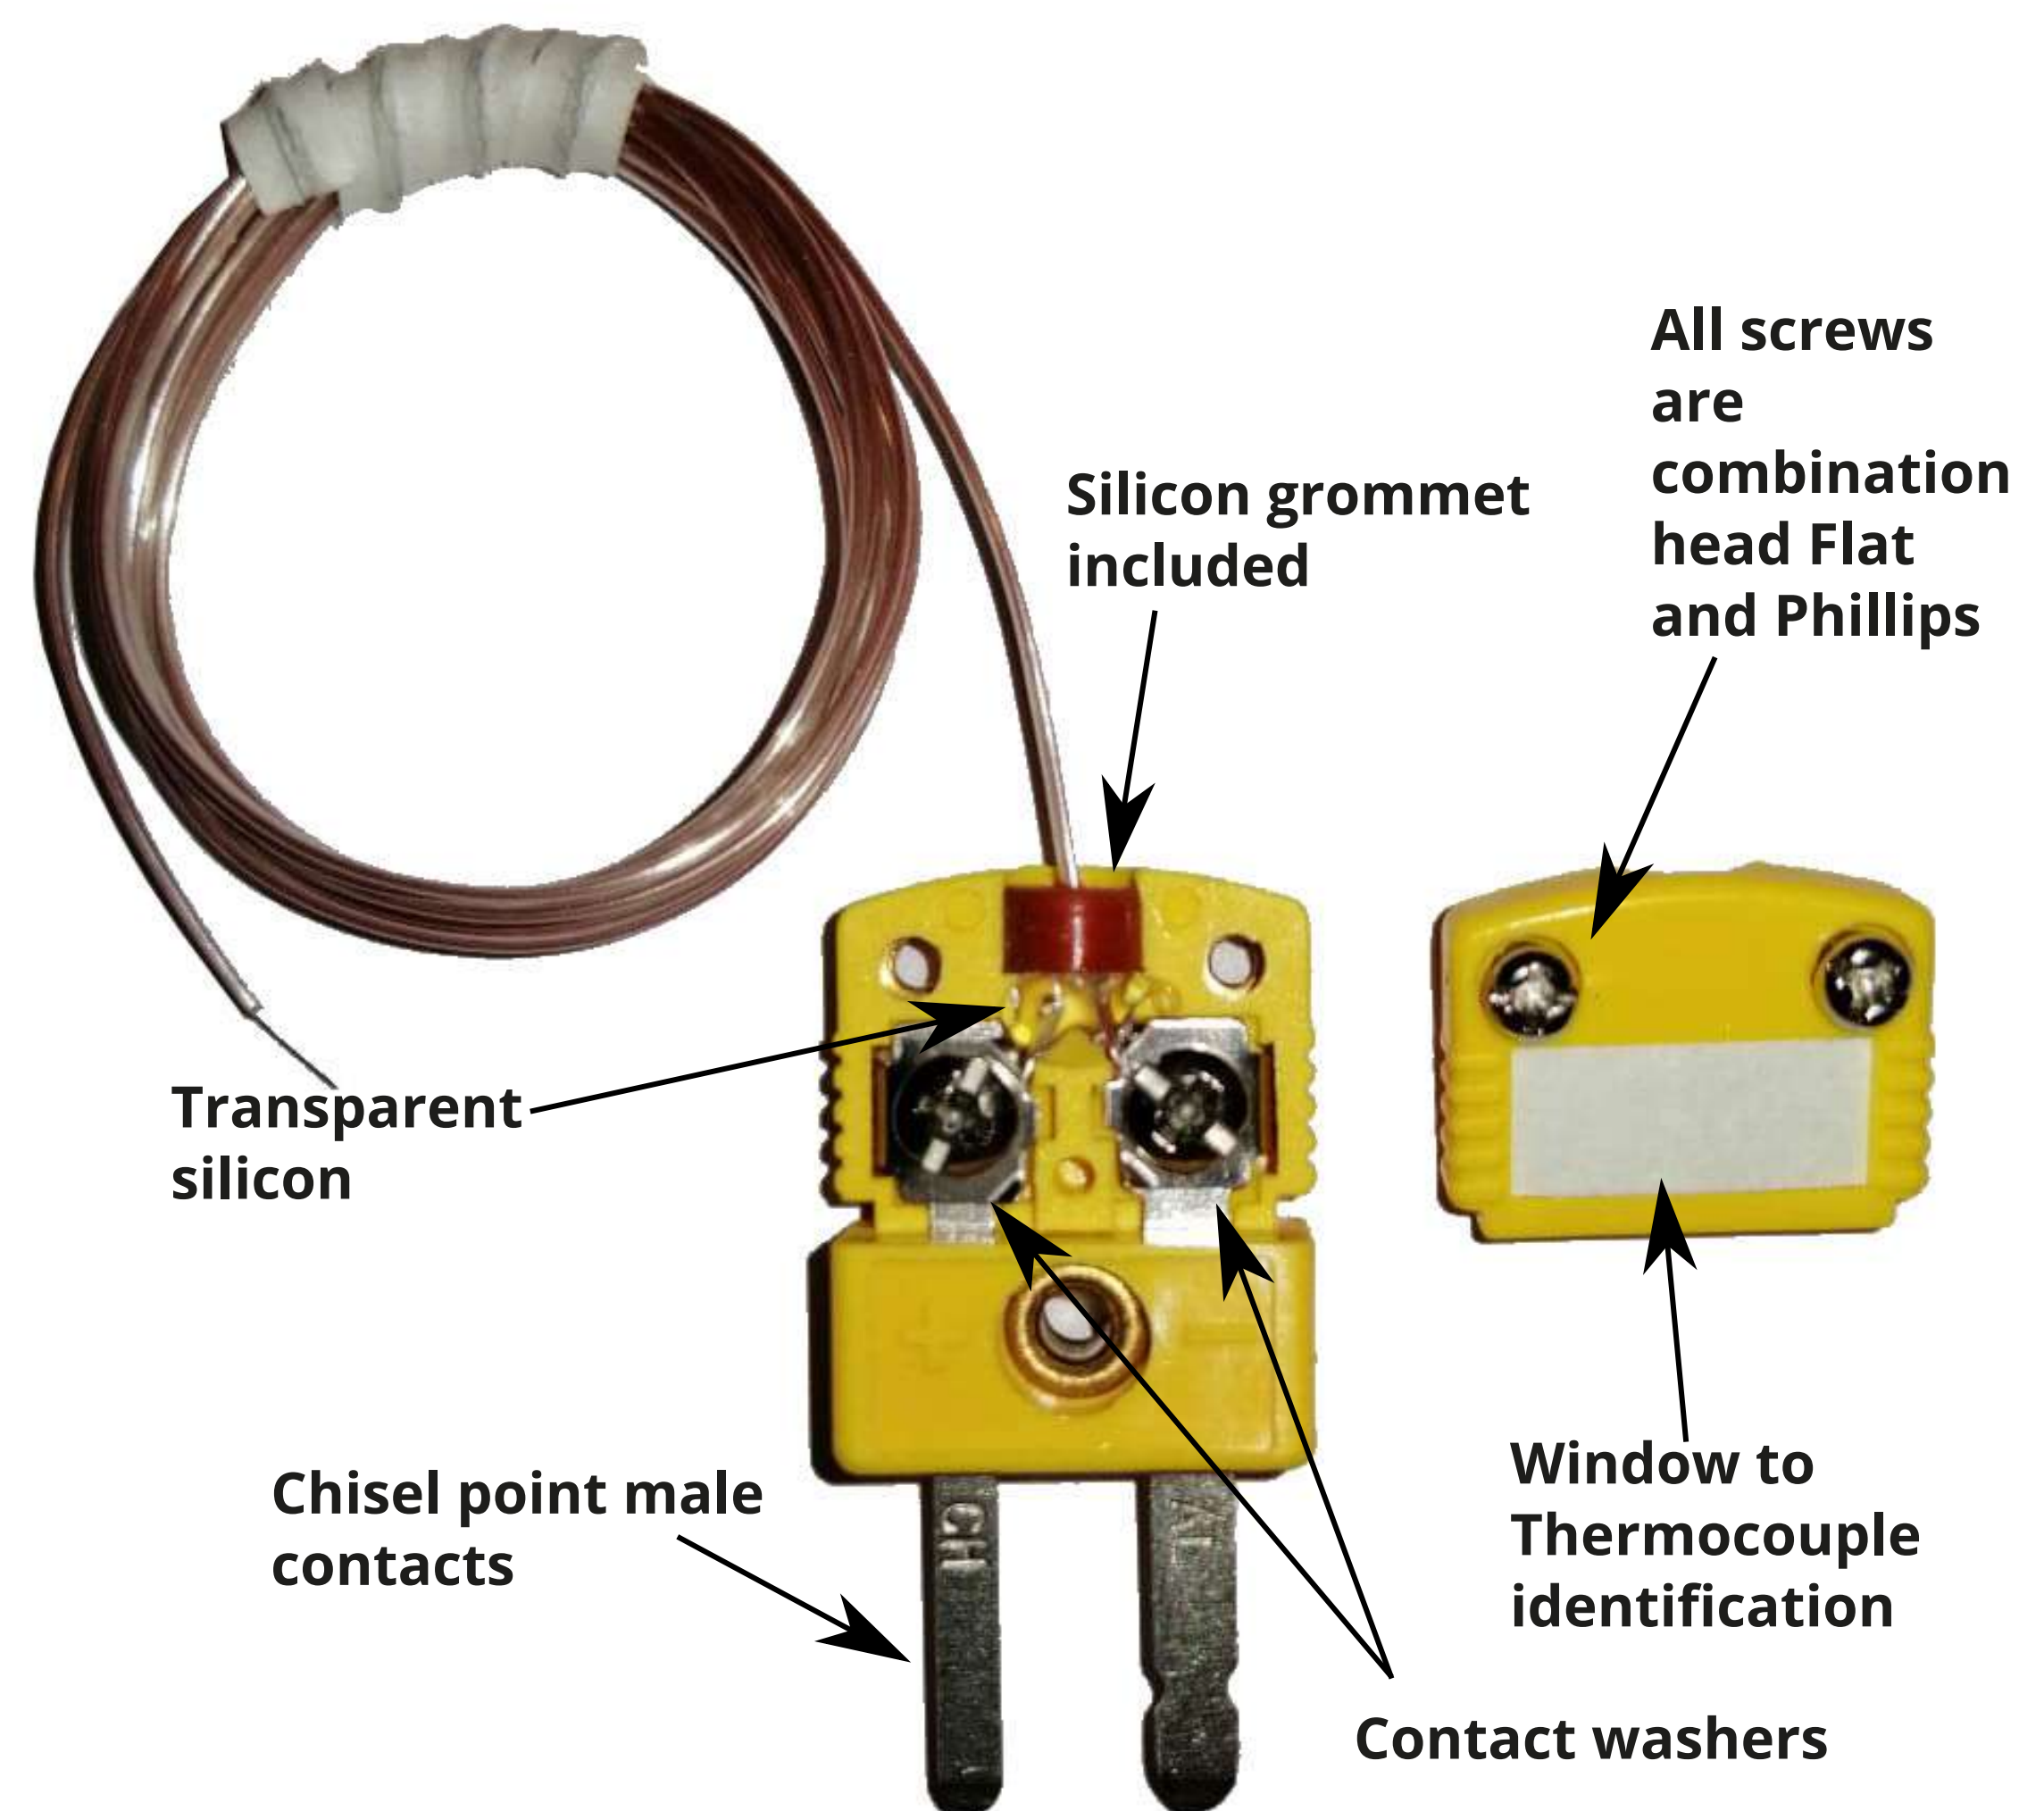

GLOBALTECH

SALES & SERVICES

www.globaltechss.com

✉ sales@globaltechss.com

☎ MX +52-33-3693-0210

☎ USA 210-485-4233